

# Sleeve Applicator



Sleeve Applicator Series 8500

Labeling System

Model

# 8500


**NEW**

# Sleeve Applicator Series 8500 Specifications

The NEW Label-Aire® Sleeve Applicator Series Model 8500 is a fast, efficient, and easy-to-operate single head shrink sleeve labeling system that can easily handle most tamper-evident, overall-, middle-, and full-body sleeve (including sustainable film) applications.

Specifically designed for high speed runs of up to 400 products per minute, the new Model 8500 will easily handle all industry standard sleeve materials and a wide range of container shapes and sizes.

The Label-Aire Sleeve Applicator Series Model 8500 is designed to meticulous specifications including: Easy-to-operate PLC controls, stainless steel construction, high-speed operation, and standard stepper drive technology. Also available with servo drive and Allen Bradley control/drive options.

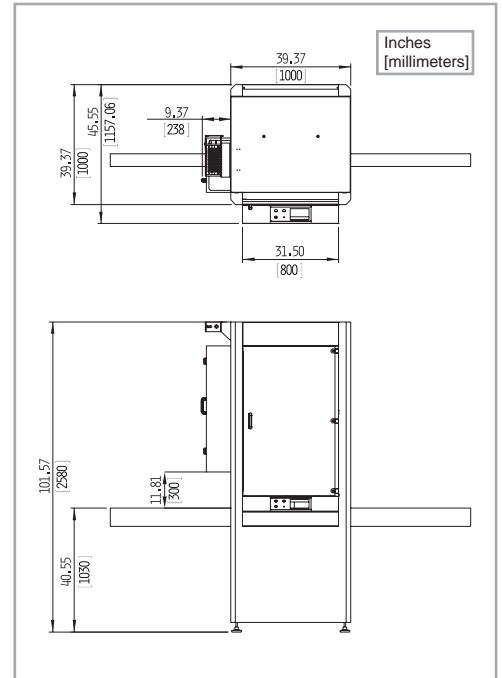

*Stated dimensions are approximations. Please consult factory if dimensions are required for line integration.*

Sleeve Applicator Series 8500 <small>Advanced Features</small>	
<b>HMI touch screen</b>	Advanced input devices provides seamless operation.
<b>Stainless steel and anodized aluminum construction</b>	Handles the most hostile work environments.
<b>Patented cutting assembly</b>	Results in high productivity and long blade life.
<b>Stepper drive technology</b>	Advanced film feed system ensures accuracy.
<b>Transparent safety doors</b>	Provides full operator protection during labeling.
<b>Wide product capability</b>	Handles product widths from 1.0625" (26.9875 mm) to 4.625" (117.475 mm) for added versatility.
<b>Variety of applications</b>	Tamper evident, overall-body, middle-body, and full-body sleeve.

## Dimensions:

Height: 101.57" (2,580 mm)  
 Length: 40.55" (1,030 mm)  
 Width: 39.37" (1,000 mm)

## Weight:

Approx. 2,140 lbs. (800 kg)

## Maximum Sleeve Lay Flat:

7.48" (190 mm)

## Maximum Product Width:

1.0625" (26.9875 mm) to  
 4.625" (117.475 mm)

## Product Throughput Rate:

Up to 400 ppm

## Electrical:

220 Volts AC 50/60 Hz 5 Amps. (10 kw),  
 Three phase

## Options:

**Consult factory for shrink tunnel and additional options.**



### Headquarters

550 Burning Tree Road  
 Fullerton, CA 92833 USA

o 714.449.5155  
 f 714.526.0300  
 e info@label-aire.com  
 w www.label-aire.com

### Europe

Sjællandsvej 27A  
 DK-9500 Hobro, Denmark

o +45.9657.0063  
 f +45.9657.0064  
 e info@label-aire.com  
 w www.label-aire.com

### Asia

No. 10, Lane 228, Taisi S. Road  
 Longjing Township  
 Taichung County 434, Taiwan

o +886.4.2395.5684  
 f +886.4.2395.8007  
 e info@label-aire.com  
 w www.label-aire.com